

www.fixolite.be Tel.: +32 71 25 87 90 Email: info@fixolite.be VAT: BE0401.648.294

# PRODUCT FORM C-R31S30 8-28FR+F



## Reference : C-R31S30 8-28FR+F

The Fixolite box is a 6 m long prefabricated lintel box designed to receive a closure (roller shutter, BSO, etc.). The box consists of an inverted Ushaped, fire-retardant expanded polystyrene (30 kg/m<sup>3</sup> density) shell reinforced with steel mesh. The side walls are fitted with aluminum rails.


**Reinforced model box.** This box is reinforced by 3 mm steel brackets, every 1.2 m and is intended for openings of more than 1.6 m. The box is certified by Technical Advice to the CSTB.


	Туре	R31S30
	Outer rail ref.	827
	Inner rail ref.	28FR
	Color	Grey graphitized polystyrene
	Compatible cheek	J-30
	Certification	CSTB 16-11-634 (translated)
	Thermal conductivity	$U = 1.1 \text{ W/m}^2.\text{K}$
	Thermal resistance*	$R = 0.91 \text{ m}^2.\text{K/W}$
		(m².K/W) taking into account a . .K after application of a safety
	Weight	4.11 kg/m
	Reaction to fire	class E (EN ISO 11925- 2/EN 13 501)
	Air permeability	c*3 class

Acoustic perf. ( $Dn_W$ ) 55 dB

## Box dimensions

306 mm 302 mm
302 mm
246 mm
34 mm
26 mm
.19 kg/m
.92 kg/m
.05 kg/m
.95 kg/m
1 <b>1 kg/m</b>




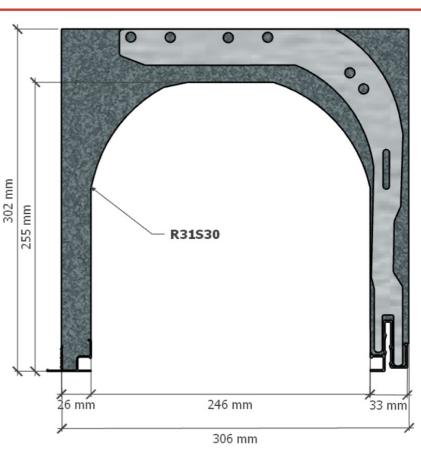

Box shown: C-R31S30 8-28FR


#### Sides finishing







#### Rail diagram



# English version Version française





**2024-05** • Fixolite Disclaimer. The information provided in this technical sheet is for reference only and without warranty of accuracy or completeness. Fixolite disclaims any liability for errors, omissions, or consequences related to the use of this information. Specifications are subject to change without notice.