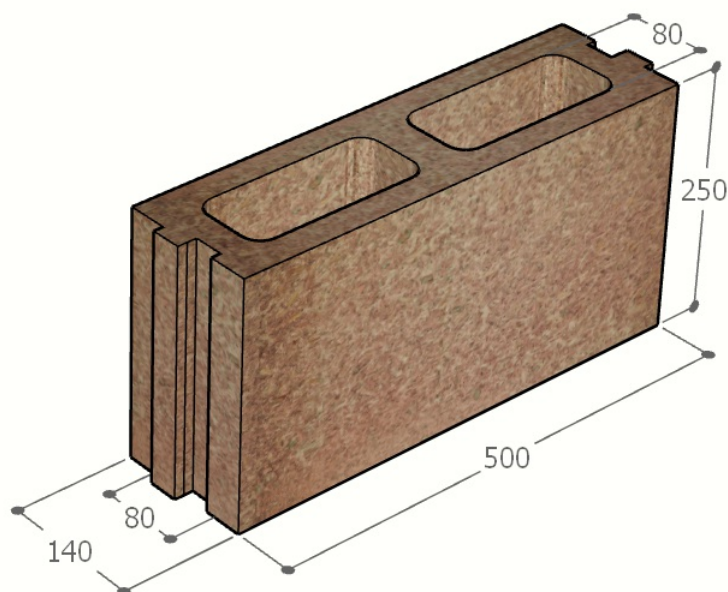


FIXOLITE CLASSIC (CL blocks)**Reference : B-CL 14/8**

Fixolite wall blocks, made in Belgium

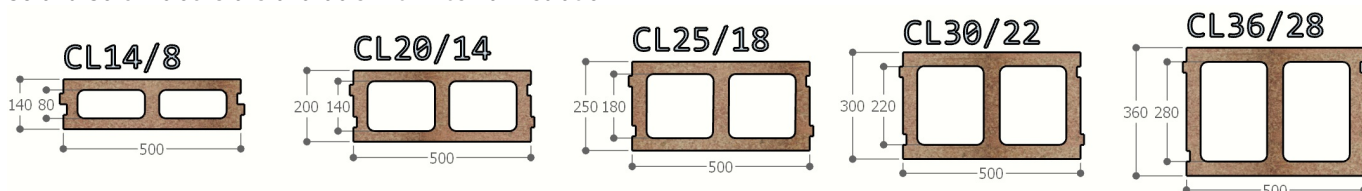
. Dimensions are 50 cm wide, 25 cm high (1m² = 8 blocks) and depth varies according to requirements. The block is made of wood-cement and, as an option, fire-retardant expanded polystyrene insulation (density 40 gr/m³).

Total thickness	14.0 cm
Insulation thickness	0.0 cm
Concrete thickness	8.0 cm
Interior side thickness	3.0 cm
Exterior side thickness	3.0 cm
Concrete volume	63.0 l/m ²
Density	± 510 kg/m ³
Weight	37.2 kg/m ²
Thermal insulation λ	0.10 W/m ² K
R coefficient	1.01 m ² K/W
U coefficient	0.99 W/m ² K
Sound absorption α	> 90% (100→5000Hz)
Sound insulation	48 dB
Reaction to fire	Non-flammable (M1)
Fire resistance	> 6h (ISO 834)
Rot-proof	✓
Flexural strength	± 200 DaN

**Fixolite classic block range**

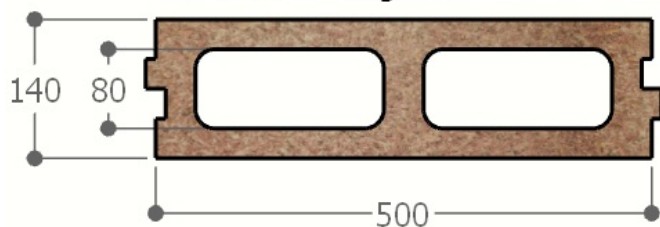
Fixolite offers 5 classic block sizes.

30 and 36 cm blocks are available with internal insulation.

**Notes**

Block suitable for non-load-bearing walls or partitions (without polystyrene).

No special blocks available for this model.

CL14/8

English version :

https://fixolite.eu/doc/B_CL_14_8.en.pdf



Version française :

https://fixolite.eu/doc/B_CL_14_8.fr.pdf