

Reference : C-28H29 8-8

The Fixolite box is a 6 m long prefabricated lintel box designed to receive a closure (roller shutter, BSO, etc.). The box consists of an inverted U-shaped, fire-retardant expanded polystyrene (30 kg/m³ density) shell reinforced with steel mesh. The side walls are fitted with aluminum rails.

Traditional model box. This box is the most economical and offers good performance. The box is certified by Technical Advice to the CSTB.


| | |
|--|--|
| Type | 28H29 |
| Outer rail ref. | 827 |
| Inner rail ref. | 827 |
| Color | Blue polystyrene |
| Compatible cheek | J-28 |
| Certification | CSTB 16-11-634 (translated) |
| Thermal conductivity | U = 1.56 W/m ² .K |
| Thermal resistance* | R = 0.64 m ² .K/W |
| (*) R: thermal resistance (m ² .K/W) taking into account a λ coefficient of 0.0374 W/m.K after application of a safety coefficient of 1.15. | |
| Weight | 1.99 kg/m |
| Reaction to fire | class E (EN ISO 11925-2/EN 13 501) |
| Air permeability | c*3 class |
| Acoustic perf. (Dn _w) | 49 dB |

Box dimensions

| | |
|---------------|--------|
| Width | 278 mm |
| Height | 285 mm |
| Tunnel | 230 mm |
| External side | 24 mm |
| Internal side | 24 mm |

Components

| | |
|---------------------------|------------------|
| Aluminium (recycl. 85%) | 0.57 kg/m |
| Steel (recycl. 96.5%) | 0.76 kg/m |
| Polystyrene (recycl. 10%) | 0.66 kg/m |
| Total | 1.99 kg/m |

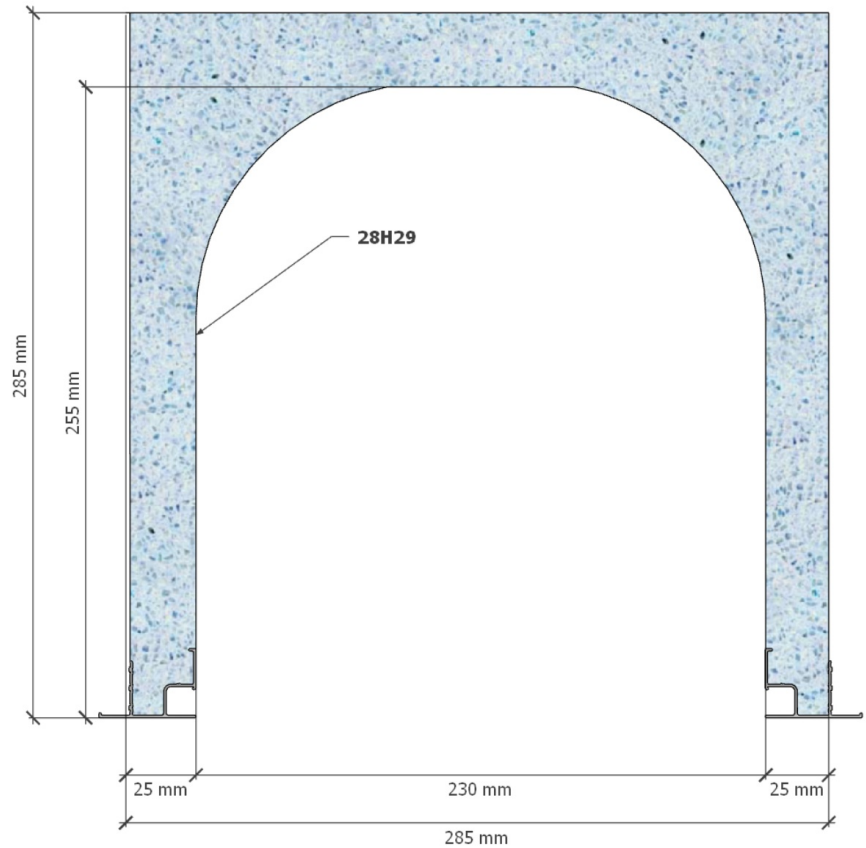

Sides finishing



External side
Ribbed polystyrene



Internal side
Ribbed polystyrene



Rail diagram



English version **Version française**



2024-05 • Fixolite Disclaimer. The information provided in this technical sheet is for reference only and without warranty of accuracy or completeness. Fixolite disclaims any liability for errors, omissions, or consequences related to the use of this information. Specifications are subject to change without notice.